

Sectional Overhead Door Installation Requirements

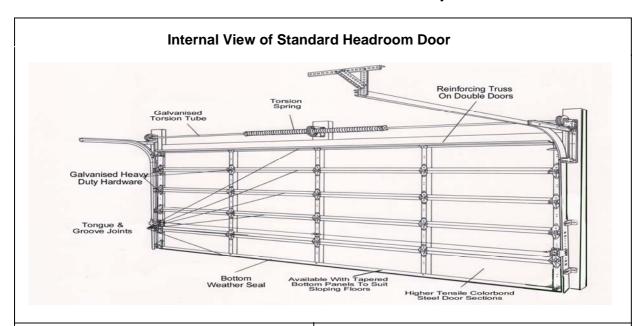


Standard Headroom Requirements



Clearances									
Door height	Head room	Head room with Auto*	Head room with QC*	Side room	Back room	Back room with Auto			
2210	300	350	300	120	2510	3200			
2400	300	350	300	120	2800	3500			
2700	330	380	330	150	3100	4100			
3000	330	380	330	150	3400	4100			

Low Headroom Requirements



Clearances									
Door height	Head room	Head room with Auto*	Side room	Back room	Back room with Auto				
2210	170	220	150	2710	3200				
2400	170	220	150	2900	3500				
2700	200	250	180	3300	4100				
3000	200	250	180	3600	4100				

^{*}Notes:

1. Headroom with automatic operators allows for the use of domestic operators – more headroom may be required in heavy duty or commercial applications

2. Headroom with QC (Quick Closers) includes clearance for a domestic operator – Quick Closers are not recommended on manual doors.